

MOBILE FITTING

CZ288

Mobile Fitting Tire Changer

Pneumatic locking swing arm design

Powers 0.85 kW


Voltages 24V / 110V / 220V

Outside clamping range 10-21''

Inside clamping range 12-24''



What sets the CZ288 apart

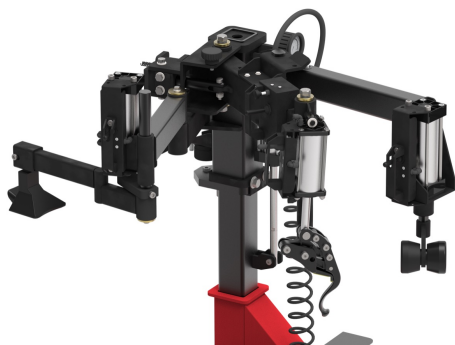

Vehicle-mounted mobile fitting system

The compact CZ288 layout is engineered for installation in a service vehicle, allowing professional tyre work to move closer to the customer while preserving a practical operating envelope.

— COSENG · CZ288

Compact integrated machine


Major working systems are consolidated into a space-efficient package. The integrated arrangement supports mobile operation while keeping controls and service points within easy reach.

— COSENG · CZ288

02



03

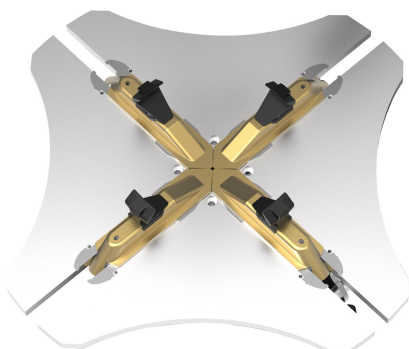

Manganese steel turntable

The high-strength turntable combines hardness, wear resistance and impact resistance for dependable clamping performance through repeated workshop and mobile service cycles.

— COSENG · CZ288

What sets the CZ288 apart



350-degree articulated assist arm

The three-joint assist arm rotates around the working centre to approach the tyre from multiple positions, giving the operator flexible support during mounting and demounting.

COSENG · CZ288

Controlled sidewall support

Dedicated pressing tools help hold stiff sidewalls below the rim flange. Controlled support reduces repeated repositioning and makes difficult tyre work more predictable.

COSENG · CZ288

05




Leverless automatic demount head

The automatic head engages and guides the bead without a conventional tyre lever, helping streamline the service sequence while reducing direct contact with the rim.

COSENG · CZ288

Components & build detail


Key components and assemblies of the CZ288.

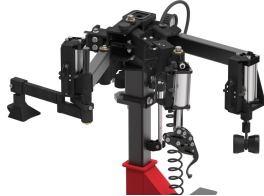

Vehicle-mounted CZ288 installation



Compact CZ288 machine layout

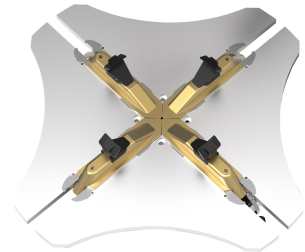

Manganese steel turntable



Articulated assist arm



Assist-arm pressure tools




Automatic demount head

CZ288 specifications

Outside clamping range	10-21''	Powers	0.85 kW
Inside clamping range	12-24''	N./G. weight	215 / 247 kg
Rim width	300 mm	Packing DIM	1000 × 850 × 1350 mm
Max. wheel diameter	960 mm	Machine-space DIM	1200 × 1200 × 1200 mm
Work pressure	8-10 bar	Noise	<70 dB
Operation speed	6 rpm	Max QTY In Container	13 pcs (20'') & 26 pcs (40'')
Voltages	24V / 110V / 220V		

INCLUDED EQUIPMENT

Standard accessories

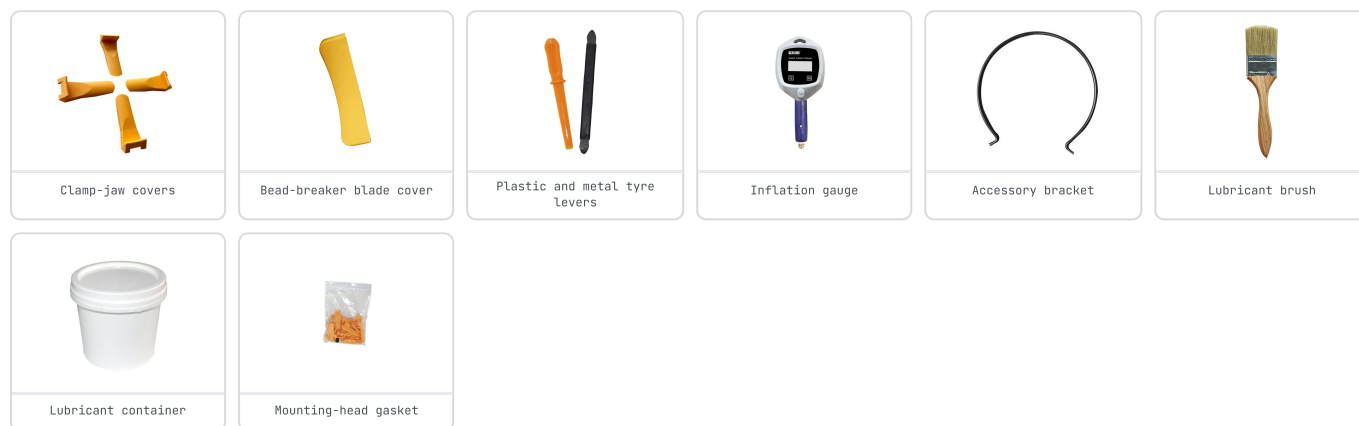
1998

FOUNDED · HK-OWNED

60+

EXPORT COUNTRIES

CE-ISO

9001:2015 CERTIFIED

OEM

ODM AVAILABLE

Request a quotation for the CZ288

carson@coseng.com.cn · +86 137 2785 7065 · No. 6 Shuanglin East Road, Jinwan District, Zhuhai, China

